



## SPECIFICATIONS

*The Power Lynx 3 maintains efficient AC Power eliminating noise, spikes, surges and brownouts. When the utility fails the unit will continue to provide AC voltage without the slightest interruption.*

### POWER RATING

- 3 kVA - 125 kVA three phase output unit that uses the latest DSP/PWM technology to provide the most advanced performance and reliability features

### INPUT

- 208Y/120, 480Y/277, 208 or 480 VAC

### OUTPUT


- 208Y/120 or 480Y/277VAC,  $\pm 2\%$  efficient.  
>92% efficient

### BATTERIES

- Sealed, maintenance-free, lead calcium (AGM) batteries
- 10-Year prorated warranty
- DSP/PWM Smart Battery Monitoring System is **TEMPERATURE COMPENSATED** maintaining maximum runtime and battery life
- Microprocessor controlled recharge and DSP/PWM overcharge protection standard

### CODES

- UL 1778
- Complies with the Buy American Act

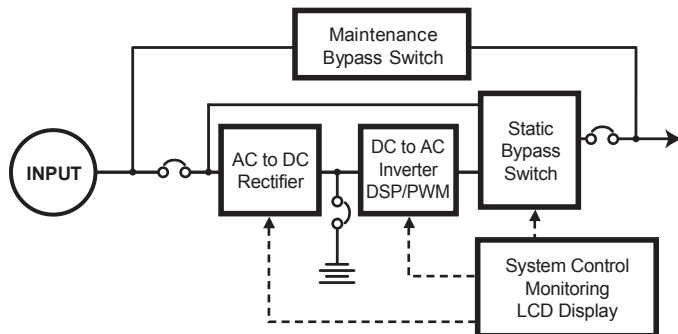

Catalog Number	
Project	Notes
Signature	Date

**15 kVA - 125 kVA**

**Three Phase**

**Outdoor  
Uninterrupted  
Power  
Systems**



### PROTECTION

- Provides overload, surge and undercurrent protection using DSP/PWM technology and DSPM *Watchdog Software* to protect system performance and reliability
- Surge protection against load surges as defined in ANSI/IEEE C62.45 category A and B

### DIAGNOSTICS AND MAINTENANCE

- DSP/PWM technology and DSPM *Watchdog Software* provides complete self diagnostic capabilities and LED Monitoring
- Informative advanced Display and Alarms keep you in control of your environment 24/7
- Automatically performs periodic self-tests
- Single point of testing instead of multiple testing points with battery packs

### NEMA 3R CABINET

- Modular design enables flexible installation
- Forced air cooling for maximum reliability
- All systems are self contained

### INSTALLATION

- Modular design and small footprint allow easy installation in electrical closet or other convenient locations
- Factory start-up standard for all systems
- Extended warranty available

### WARRANTY

- 1-Year full warranty on system electronics
- Battery warranty 1-year with 9-years pro-rated
- System 1-year on-site warranty labor with DSPM phone assisted start-up
- 5-Year powertrain warranty
- Maintenance contracts available



Power Lynx Series	Power Rating	Total Watts	UPS			Battery			Weight	Battery Type	Voltage (VAC)		Output Protection
			Cabinet Dimensions			Cabinet Dimensions			(combined)		Input	Output	
PLO3	kVA	KW	W	H	D	W	H	D	(lbs)	Sealed, Maintenance free (AGM) lead calcium	Input <u>Select</u> 208Y/120VAC or 480Y/277VAC (Consult factory for others)	Input and output circuit breakers standard	
	3	2.1	41"	72"	35"	not required							
	5	3.6	41"	72"	35"	not required							
	7.5	4.8	41"	72"	35"	not required							
	10	8	41"	72"	35"	not required							
	15	12	41"	72"	35"	not required			1950				
	30	24	41"	72"	35"	not required			2400				
	50	40	41"	72"	35"	41"	54"	35"	3380				
	75	60	41"	72"	35"	41"	54"	35"	3600				
	100	80	41"	72"	35"	41"	54"	35"	4100				
125	100	41"	72"	35"	41"	54"	35"	4500					

The Power Lynx 3 is always on-line eliminating noise, spikes, surges and brownouts. When the utility fails, the PLX3 will continue to provide AC voltage without the slightest interruption. The PLX3 generates an output sine wave that uses a high frequency PWM. The output Transformer isolates your critical load from any source of noise, so that your equipment is always protected. It's comprehensive monitoring checks each output, and input individually so you always know what is going on with your critical load. Alarm settings are field adjustable via the front panel. A microprocessor will store any alarm so a history is always available.

You deserve the **peace of mind** that the Power Lynx from **DSPM** ensures.

## ORDERING INFORMATION

Choose the bold face catalog nomenclature that best suites your needs.

Write them on the appropriate line. Order accessories as separate catalog number.

Example:

**PLO3 - 30 - 208Y/120 208Y/120- EMB OCB/120/5**

Description of example:

(30 kVA, 208Y/120 Voltage In, 208Y/120 Voltage Out, External Maintenance Bypass Switch, 5 Output 120V Circuit Breakers)

PLO3				
FAMILY	POWER RATING	VOLTAGE <sup>1</sup>	OPTIONS	TIME
	kVA	Input - Output	RSSP - Remote Indicator Panel	Minutes
	3	208Y/120 - 208Y/120	SNMP - SNMP Card	10
	5	208Y/120 - 480Y/277	FC - Form C Contacts	15
	7.5	480Y/277 - 208Y/120	OCB - Output Circuit Breaker(s)/voltage/qty	20
	10	480Y/277 - 480Y/277	SRB - Seismic rated bracket	25
	15	480 - 208Y/120	EMB - External maintenance bypass switch	30
	30	480 - 480Y/277	HE - Heat exchanger	45
	50	208 - 208Y/120	HTR - Heater	60
	75	208 - 480Y/277	EW - Extended warranty	120
	100		HEC - NEMA 4, 4X	180
	125			240
				XXX

### NOTES:

1-Consult factory for other voltage requirements. Special voltages may effect the weight, size and number or cabinets.

2-One ECM is used per switching device or circuit.

Specifications subject to change without notice.



1921 S. Quaker Ridge Place  
Ontario, CA 91761  
Ph: 1.877.DSPM POWER  
1.877.377.6769  
Fax: 909.930.3335