


# FREQUENCY CONVERTER

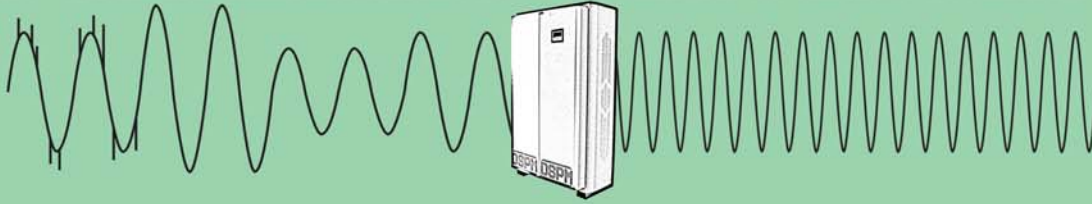

## OUTDOOR FREQUENCY CONVERTER


50, 60 or 400 Hz.

**Three Phase 10 kVA - 125 kVA**

Made In The USA 


*Defends your environment against unwanted frequency fluctuations and electrical changes by providing:*

- DSPM Watchdog software always on guard.
- Display monitor keeps you in control 24/7.
- Dependable DSP/PWM technology for unsurpassed reliability.
- Economical for the lowest overall cost for your frequency conversion, with an Energy Star Rating.
- Self-diagnostics for a safe and secure frequency environment.
- Sine wave output for linear loads.
- ECM module is a patented technology used by DSPM.
- Solutions for multiple applications such as: factories, military, airports and more!
- 5 Year power train warranty.
- Meets federal, state and local codes: NFPA 101, NFPA 70, NEC and OSHA.
- Built to UL 1778.
- Complies with the Buy American Act.

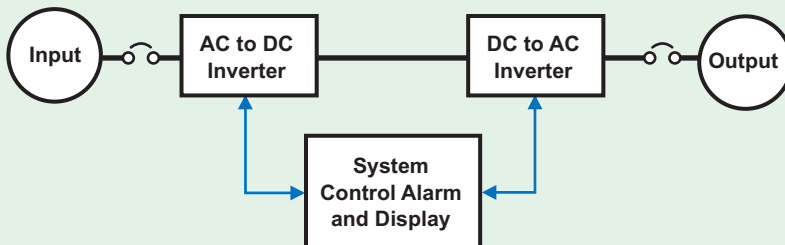

Email: [info@DSPManufacturing.com](mailto:info@DSPManufacturing.com)  
1921 S. Quaker Ridge Place  
Ontario, CA 91761  
Ph: 1.877.DSPM POWER  
1.877.377.6769  
Fax: 909.930.3335

# FREQUENCY CONVERTER

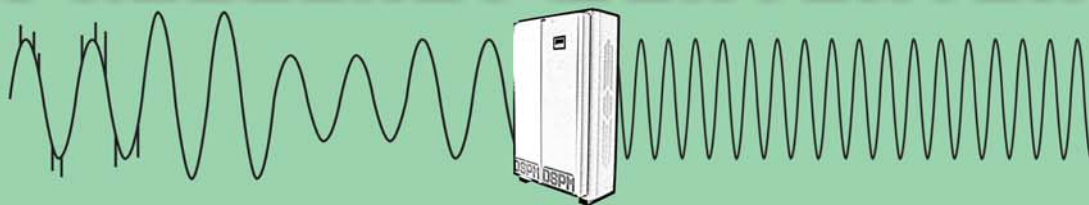

- \*Standard Power Levels.....10.0, 12.0, 16.0, 20.0, 24.0, 30.0,  
40.0, 50.0, 60.0, 80.0, 100.0 and 125.0 kVA
- \*Input Voltage .....208, 380, 400, 415, 220, 380 or 480 VAC
- \*Input Voltage Range.....+10%, -15%
- \*Output Voltage.....208VY, 380VY, 400VY, 415VY or 220VΔ, 480VΔ or  
208Y/120, 380Y/220, 400Y/230, 415Y/240, 220Y/127 or 480/277 VAC
- \*Output Voltage Regulation.....±3% for all loads
- \*Output Frequency.....60 Hz ±1%, 50Hz ±1% or 400 Hz ±1%
- Output Wave Form.....Sine-wave <5% @ 100% linear load
- Crest Factor.....2.5:1 typical
- Input Protection.....Input Main Circuit Breaker
- Output Protection.....Output Main Circuit Breaker
- Surge Protection.....The unit will protect itself and the load  
against surges as defined in  
ANSI/IEEE C62.45 category A and B
- Efficiency.....≥92% at 100% linear load
- Overall Efficiency.....93%
- Audible Noise.....<45dB measured on Response Curve "A"
- Operating Temperature.....0° to 40°C (32° to 104°F)
- Storage Temperature.....-20° to 60°C (-4° to 140°F)
- Humidity.....5 - 95%, Non-condensing
- Overload.....<100% Continuous, 110-125% 15 Minutes,  
125-150% 10 Minutes, >150% 1 Minute
- Cabinet.....NEMA 3R

\*Consult factory for others.

Specifications subject to change without notice.



Frequency Converter Series	Power Rating	Cabinet Dimensions				Weight
FCOT (Consult factory for others)	kVA	W	H	D		(lbs)
	10	41"	72"	32"		1310
	12	41"	72"	32"		1410
	16	41"	72"	32"		1510
	20	41"	72"	32"		1610
	24	41"	72"	32"		1710
	30	41"	72"	32"		1810
	40	41"	72"	32"		1910
	50	41"	72"	32"		2260
	60	41"	72"	32"		Consult Factory
	80	41"	72"	32"		Consult Factory
	100	41"	72"	32"		Consult Factory
	125	41"	72"	32"		Consult Factory

## Options:

- ECM - Environmental Control Module
- OCB - Output Circuit Breaker(s)
- SRB - Seismic-Rated Bracket
- STU3 - Onsite Startup
- HE - Heat Exchanger
- HTR - Heater
- EW - Extended Warranty
- HZ - 50, 60, 400



Email: [info@DSPManufacturing.com](mailto:info@DSPManufacturing.com)  
 1921 S. Quaker Ridge Place  
 Ontario, CA 91761  
 Ph: 1.877.DSPM POWER  
 1.877.377.6769  
 Fax: 909.930.3335

Represented by: